



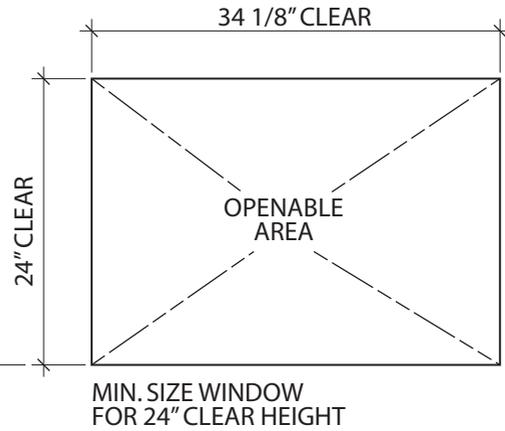

EMERGENCY ESCAPE AND RESCUE: EXIT WINDOWS [CBC 1026]

WHEN REPLACING WINDOWS, THE FOLLOWING REQUIREMENTS APPLY:

1. PERMIT IS REQUIRED
2. ALL NEW WINDOWS MUST BE DUAL GLAZED
3. NEW WINDOWS SHALL HAVE A 0.67 MAX. U-FACTOR AND 0.40 MAX. SHGC
4. LEAVE NFRC LABELS ON WINDOWS FOR INSPECTION
5. 20" MINIMUM CLEAR WIDTH AND 24" MINIMUM CLEAR HEIGHT
6. 5.7 SF MIN. OPENABLE AREA EXCEPT GRADE-FLOOR OPENINGS SHALL BE 5 SQUARE FEET [CBC 1026.2]
7. BOTTOM OF CLEAR OPENING NOT MORE THAN 44" FROM THE FLOOR [CBC 1026.3], OR LESS THAN 24" FROM THE FLOOR FOR 2ND STORY [CBC 1405.12.2]

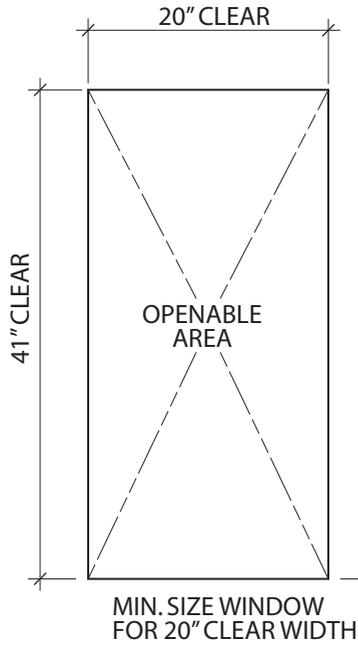


FLOOR LEVEL

44" MAX.
24" MIN. FOR
2ND STORY
WINDOWS


THE FOLLOWING WINDOW SIZES WILL BE THE MINIMUM ALLOWED FOR EGRESS UNLESS MANF. DATA IS SUPPLIED:

STANDARD 6'-8" HEADER HEIGHT

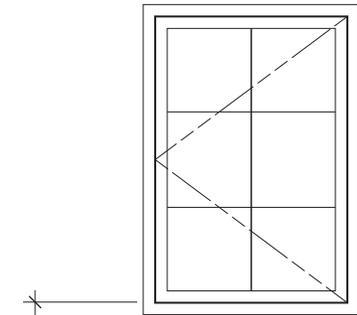


- SINGLE CASEMENT:**
 2-4 X 4-0
 2-6 X 3-6
DOUBLE CASEMENT:
 4-8 X 4-0
CASEMENT/FIXED COMBO:
 7-0 X 4-0

- OTHER WINDOW TYPES:**
AWNING:
 NONE W/O MANF. DATA
BAY W/ FIXED CENTER:
 NONE W/O MANF. DATA

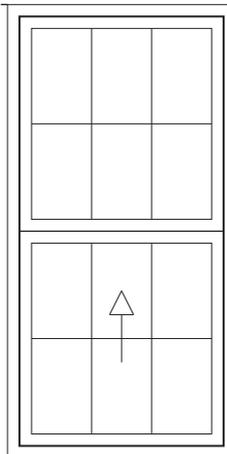

- SINGLE/DOUBLE HUNG:**
 3-0 X 5-0
 3-0 X 5-6
 3-4 X 5-0
 3-8 X 5-0
 4-0 X 5-0
SINGLE/FIXED COMBO:
 NONE W/O MANF. DATA

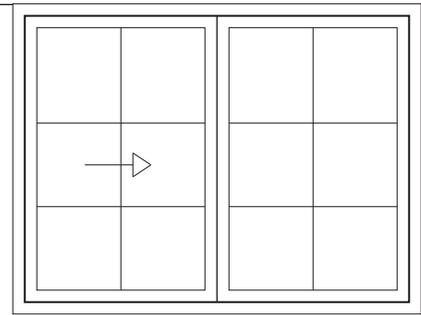

- SLIDER:**
 4-0 X 4-0
 5-0 X 3-6
 6-0 X 3-0
SLIDER/FIXED COMBO:
 8-0 X 4-0
 10-0 X 4-0
 12-0 X 3-0

NOTE: ALTHOUGH SIZES ARE TAKEN FROM DATA SUPPLIED BY WINDOW MANUFACTURERS, THESE ARE GENERAL DIMENSIONS. IT IS THE OWNER'S RESPONSIBILITY TO VERIFY THAT THE ACTUAL WINDOWS INSTALLED MEET THE MINIMUM EGRESS REQUIREMENTS.

44" MAX. ALL WINDOWS
24" MIN. FOR 2ND STORY WINDOWS

FLOOR LEVEL