




CITY OF BURBANK





Community Development Department
Building and Safety

ATTACHED PATIO COVER




PATIO COVERS SHALL BE USED ONLY FOR RECREATIONAL PURPOSES AND NOT AS CARPORTS, GARAGES, STORAGE ROOMS OR HABITABLE ROOMS. WHERE PATIO STRUCTURE SERVES AS AN EXIT FROM THE DWELLING, THE PATIO SHALL PROVIDE MEANS OF EGRESS CONFORMING TO CBC CHAPTER 10. FOR REQUIREMENTS ON SCREENING AND ENCLOSURE, SEE CBC APPENDIX I. PLEASE REVIEW BURBANK MUNICIPAL CODE 9-1-1 FOR ALL AMMENDMENTS TO CBC AND CRC CODE.

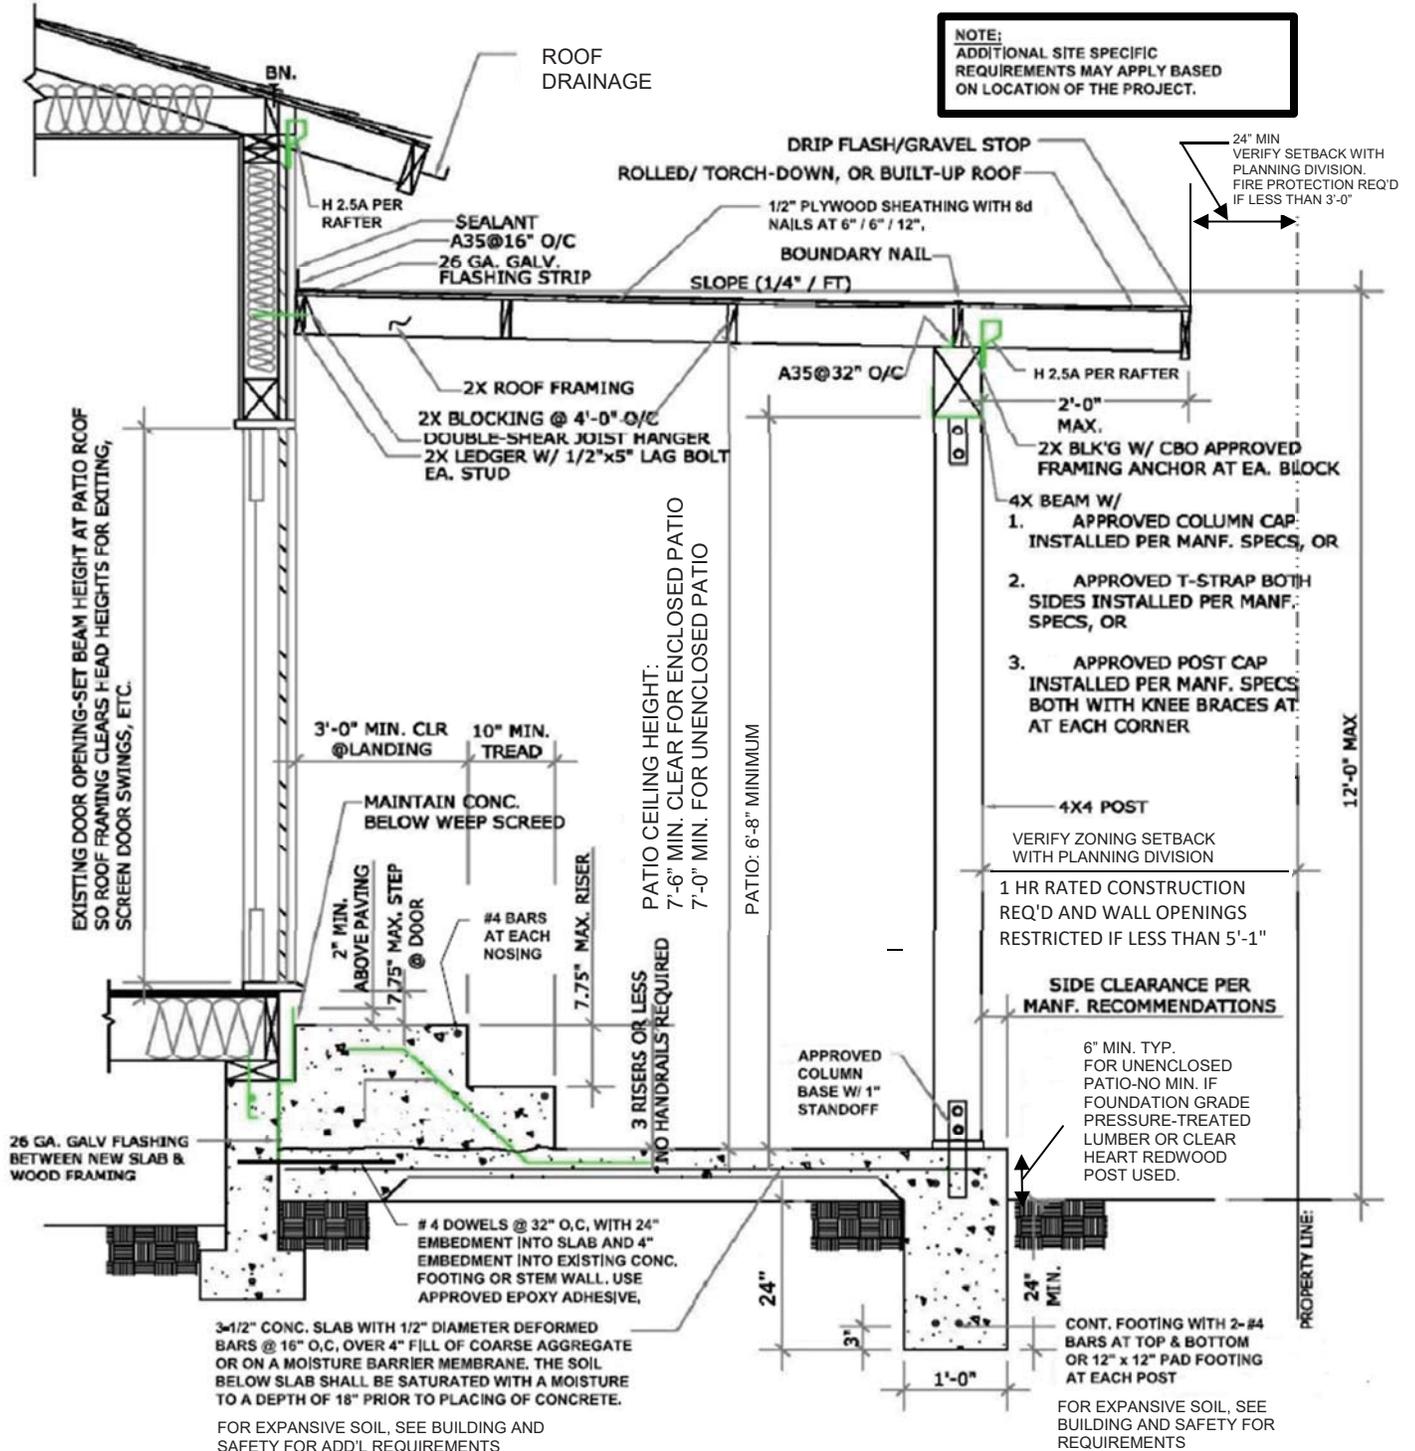

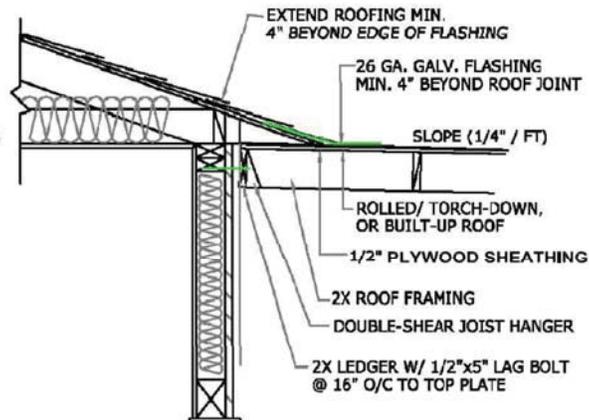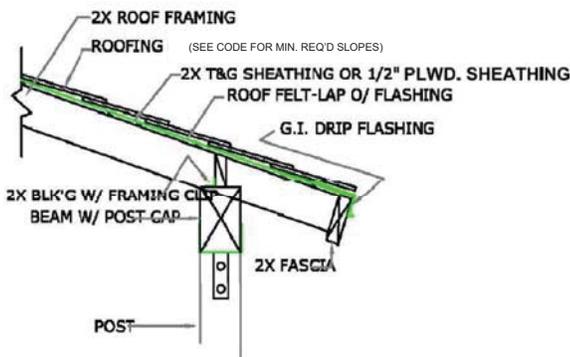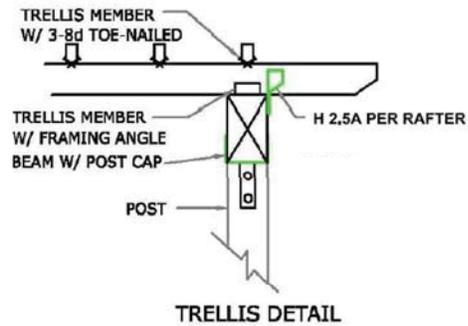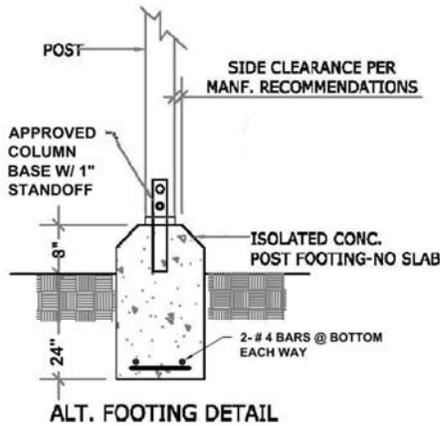

ALLOWABLE SPANS FOR DF#1 HEADER	
Maximum span of tributary load: 20'-0"	
SPAN	BEAM SIZE
Up to 4'-0"	2-2x8
4'-1" to 6'-0"	3-2x10

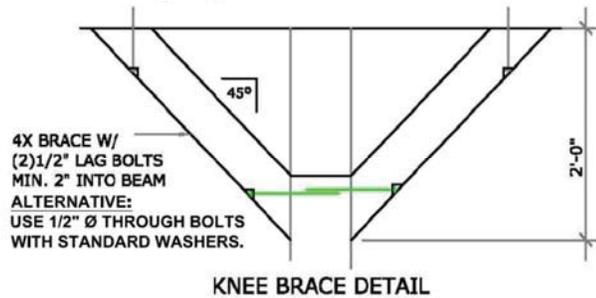

ALLOWABLE SPANS FOR DF #2 ROOF RAFTERS				ALLOWABLE SPANS FOR DF #2 CEILING JOISTS		
Live Load: 20 psf				Dead Load 5 psf/ Live Load 10 psf		
RAFTER SIZE	SPACING	ALLOWABLE SPAN		JOIST SIZE	SPACING	ALLOWABLE SPAN
2X6	24"	10' - 4"		2X4	24"	7' - 3"
	16"	12' - 7"			16"	8' - 11"
	12"	14' - 7"			12"	9' - 10"
2X8	24"	13' - 0"		2X6	24"	10' - 8"
	16"	16' - 0"			16"	13' - 0"
	12"	18' - 5"			12"	15' - 0"
2X10	24"	15' - 11"		2X8	24"	13' - 6"
	16"	19' - 6"			16"	16' - 6"
	12"	22' - 6"			12"	19' - 1"
2X12	24"	18' - 6"		2X10	24"	16' - 5"
	16"	22' - 7"			16"	20' - 2"
	12"	26' - 0"			12"	23' - 3"

TYPE V CONSTRUCTION IS CLASSIFICATION OF BUILDINGS BY CONSTRUCTION MATERIALS AND METHODS. IT IS THE LEAST RESTRICTIVE PERMITTED BY THE BUILDING CODE AND INCLUDES LIGHT WOOD FRAME CONSTRUCTION. THIS SHEET IS FOR INFORMATION AND REFERENCE ONLY AND IS NOT A SUBSTITUTE FOR ACCURATE DRAWINGS PREPARED FOR PROPOSED CONSTRUCTION PROJECT.